




MARKS USA

# 175 SERIES


## GRADE 2 CYLINDRICAL LEVERSETS

- Features The "Clutch" For Trouble Free Service
- Lifetime Mechanical Warranty

ANSI-A156.2 • Grade 2 • 3 Hour Fire Rating				Standard Features	
				<ul style="list-style-type: none"> <li>• Backset: 2-3/4"</li> <li>• Latch #1134, Front: 1-1/8" x 2-1/4"</li> <li>• Levers: Solid cast Zamac; w/ 1/2" return</li> <li>• Roses: Thru-bolted, spring loaded 2-#10 thru-bolts (Inside rose cover included)</li> <li>• Strike: #1145/32D</li> <li>• Door thickness: 1-5/8" to 1-7/8"</li> <li>• Cylinder: MARKS "C" keyway, 6 pin w/ 2 keys</li> </ul>	
MARKS #		FUNCTION	ANSI #	FINISH GROUPS	
COMM. CYL.	IC CORE CYL.*			26D	10B
N	—	PASSAGE	F75	130	193
L	—	PRIVACY	F76	155	211
P	—	PATIO	F77	155	218
DC	RDC	COMMUNICATING	F80	225	288
AB	RAB	ENTRY	F109	165	228
AQ	—	EXIT	F83	154	217
S	RS	CLASSROOM	F84	165	228
F	RF	STOREROOM	F86	170	228
DW	RDW	INSTITUTION	F87	225	288
DA	RDA	VESTIBULE	F88	225	288
FQ	—	EXIT	F89	166	229
T	RT	CORRIDOR	F90	190	253
BS	RBS	SERVICE STATION LOCK	F92	190	253
DO	—	DUMMY TRIM OUTSIDE	—	41	104
DT	—	FULL DUMMY TRIM	—	106	169
NB	—	COMM. PASSAGE	F111	120	183
FB	RFB	COMM. STOREROOM	F112	190	253
SB	RSB	COMM. CLASSROOM	F113	190	253

**LEVERS ARE PACKED 6 PER CASE**  
• IC Core Models: Tailpieces included, core not included


OPTIONS	CODE	PRICE
2-3/8" backset, 1" x 2-1/4" face	E6	NC
Solid latch for electric strike	E9	35
Less cylinder	G3	Deduct 10
Sargent conventional cylinder	F8	18
Corbin conventional cylinder	F9	18
Corbin 6 pin IC core	F12	27
Corbin 7 pin IC core	F13	27
Yale 6 pin IC core	F14	18
Yale 7 pin IC core	F15	18
Schlage 6 pin IC core (195 Only)	F19	18
Sargent IC core	F20	18
Medeco IC core large format	F21	18

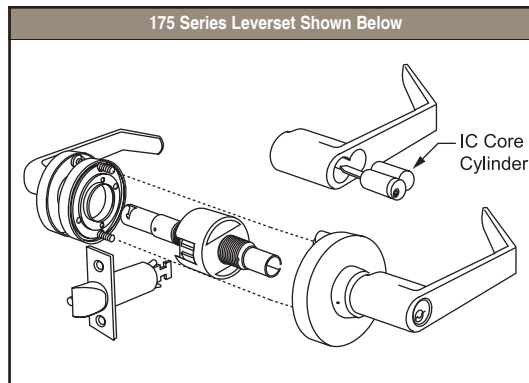

**\*Standard & HI-SECURITY™ IC Core Models:**










Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®.










**IC Core Tailpieces ARE Included.**



# CYLINDRICAL KNOB/LEVER FUNCTIONS

<b>ANSI# CODE</b>	<b>MARKS FUNCTION</b>	<b>ANSI# CODE</b>	<b>MARKS FUNCTION</b>	<b>ANSI# CODE</b>	<b>MARKS FUNCTION</b>
F75 .....	N	F84 .....	S	F90 .....	T
F76 .....	L	F86 .....	F	F92 .....	BS
F77 .....	P	F87 .....	DW	F111 .....	NB
F80 .....	DC	F88 .....	DA	F112 .....	FB
F109 .....	AB	F89 .....	FQ	F113 .....	SB
F83 .....	AQ				

ANSI # CODE	Marks Function	
	I/S	O/S
<b>F75 PASSAGE:</b> Latch by lever either side.		N
<b>F76 PRIVACY:</b> Latch by lever either side unless outside lever locked by push-button from inside. Outside unlocks by turning inside lever, outside emergency turn or closing door.		L
<b>F77 PATIO:</b> Deadlocking latch by lever either side unless outside lever locked by push-button inside. Unlocks by turning inside lever or closing door.		P
<b>F80 COMMUNICATING:</b> Key both sides. Locks or unlocks either lever independent of the other. Deadlocking latch.		DC
<b>F109 ENTRY:</b> Outside locked by pushing turn-button inside. Key outside opens lock. Rotating inside lever releases button and outside lever. By pushing and turning inside button, outside lever remains locked. Deadlocking latch.		AB
<b>F83 EXIT:</b> Deadlocking latch by lever either side except when outside locked by turn-button inside. Inside lever always opens latch. Turn-button operated manually.		AQ
<b>F84 CLASSROOM:</b> Deadlocking latch by lever inside. Outside lever locked or unlocked by key.		S
<b>F86 STOREROOM:</b> Deadlocking latch by lever inside, key outside. Outside lever always locked.		F
<b>F87 INSTITUTION:</b> Both levers always locked. Deadlocking latch by key both sides.		DW

ANSI # CODE	Marks Function	
	I/S	O/S
<b>F92 SERVICE STATION LOCK:</b> Deadlocking latch by lever either side unless outside locked by key or inside push-button. Unlock by key, turning inside lever or closing door, except when slotted push-button is turned in locked position. Inside lever always opens latch.		DA
<b>F89 EXIT:</b> Deadlocking latch by lever inside. Outside always locked.		FQ
<b>F90 CORRIDOR:</b> Deadlocking latch by lever either side unless outside locked by key or inside push-button. Unlock by key, turning inside lever or closing door.		T
<b>F92 SERVICE STATION LOCK:</b> Deadlocking latch by lever either side unless outside locked by key or inside push-button. Unlock by key, turning inside lever or closing door, except when slotted push-button is turned in locked position. Inside lever always opens latch.		BS
<b>DUMMY TRIM:</b> Outside only, rigid.		DO
<b>DUMMY TRIM:</b> Both sides, rigid.		DT
<b>F111 COMMUNICATING PASSAGE:</b> Blank outside. Deadlocking latch by lever inside.		NB
<b>F112 COMMUNICATING STOREROOM:</b> Blank outside. Deadlocking latch by key only. Lever always locked.		FB
<b>F113 COMMUNICATING CLASSROOM:</b> Blank outside. Inside lever locked or unlocked by key. Deadlocking latch.		SB

Distributed By: